



LumenRadio 信号器 E360

软件版本1.00



汇莞微信公众号



汇莞官网




汇莞APP下载



东莞市汇莞文化科技有限公司

www.huiguanwenhua.com

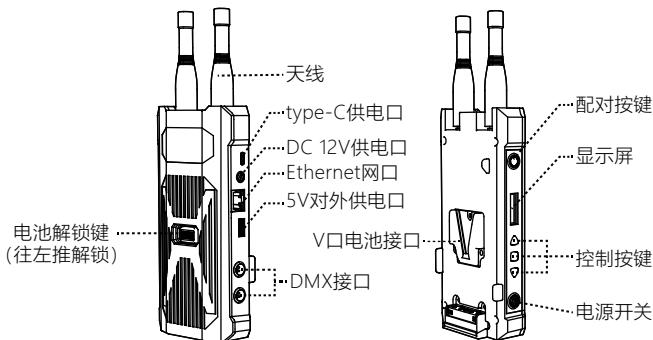

1. 电源

可使用5VtypeC口供电或12V圆口供电或14.8V的V口电池供电。

2. 多协议支持 随意控灯

支持ArtNet, CRMX, DMX, 汇莞 2.4G, 轻松连接到控台, 电脑, iPad 以及带LumenRadio模块的设备。可通过麦爵士、Lumenair、汇莞APP等软件控制。

3. 配对方法

先将需要连接的CRMX设备断开原有连接, 然后短按配对键进行配对, 一般配对完成需要5s左右。

4. 连接方法

4.1通过Ethernet网口连接
该控制器支持artnet协议, 并且具有4个域, 当您使用的控台支持artnet协议时可以通过网口连接, 使用artnet时需要将控制模式设置为APP。4个域中, 域0可以选择输出为有线DMX信号或CRMX信号。

4.2通过有线DMX口连接
通过DMX接口连接好后, 将控制模式设置为 'DMX->CRMX' 或 'DMX->2.4G', DMX信号将转换为CRMX信号或汇莞2.4G信号。

4.3通过WIFI连接
将控制模式设置为APP后, 设备的WIFI

将开启, 此时, 可以使用手机/iPAD 连接到控制器, 打开汇莞幻影APP可以对已连接的设备进行修改DMX地址码、修改配置表、关机等操作, 也可以使用luminair软件进行灯光控制。

5. 控制模式

5.1 APP/ARTNET

用户可以通过网口连接到控台或路由器, 当控制盒接收到artnet信号后, 会将其转发为无线DMX信号, 其中域0可以选择转发为CRMX或有线DMX信号。

5.2 DMX->CRMX

在该模式, 用户可以通过有线DMX口将有线DMX信号转换成CRMX信号, 通过配对键可以与具备CRMX信号接收能力的设备连接。

5.3 DMX->2.4G

在该模式下, 用户可以通过DMX信号口将有线DMX信号转换为汇莞2.4G信号, 通过配对键可以与汇莞的灯具连接。

5.4 CRMX->DMX

在该模式下, 控制盒作为从机, 会将接收到的无线CRMX信号转换为有线DMX信号, 长按配对键会与主机断开连接。

5.5 2.4G->DMX

在该模式下, 控制盒作为从机, 会将接收到的汇莞2.4G信号转换为有线DMX信号, 长按配对键会与主机断开连接。

6.产品参数

名 称	LumenRadio 信号器 E360
电 压	5V 2A 12V 1A
电 源	5VtypeC口供电、12V圆口供电或14.8V的V口电池供电
防水等级	IP20
产品重量	0.26KG
产品尺寸	255*86*42毫米
连接方法	Ethernet网口、有线DMX口或WIFI

7.注意事项

- 使用本产品前请仔细阅读说明书并理解所有内容。
- 请远离腐蚀性化学物质、液体、以免造成机械损坏。
- 不使用产品时，请切断电源并收好电源线。
- 产品使用时请整理好电源线，以免绊倒导致电源切断或产品损坏。
- 请勿自行拆卸产品，否则保修失效。产品若出现故障，请交由授权技术人员检查或维修。
- 跌落、外力撞击可能造成产品故障，人为损坏不在我司保修范围内。
- 我司对产品有最终解释权。产品设计和规格如有变更，恕不另行通知。

8.售后服务

- ①真诚感谢您选用本产品，作为我们的用户，您将得到本公司提供的售后服务：自购买产品之日起，凡产品质量问题，一年内免费保修，终身维护只收材料费。
- ②凡在保修期间，由于产品自身故障，本公司将为您提供免费维修服务，请勿自行拆机维修。超过保修期的客户仍享有本公司提供的优质售后服务。
- ③以下情况，不属于免费保修服务范围：人为造成的损坏；在未授权的情况下拆卸、改装、维修产品；由于外部原因（雷击、电源等）造成的损坏；由于用户不正确的安装或使用造成的损坏；产品附送的任何易损耗类配件的损坏；过保修期。

9.产品保修卡

用户姓名			
通讯地址			
联系电话			
购买地址			
购买价格			
产品重量		销售单号	
品名及规格		机身编号	
经销商签名		用户签名	

合格证

产品名称: LumenRadio 信号器 E360

产品型号: _____

质量等级: 合格品

检查员: _____

出厂日期: _____



为了维护您的合法权益不受到侵害，如有任何问题请及时联系售后客服。
请您妥善保存此卡（合格证），此卡将是您享受我公司的优质服务的凭证。



LumenRadio Signaler E360

Software Version 1.00



public account



Official website




App Download



Dongguan Huiguan Culture Technology Co., Ltd.

www.huiguanwenhua.com

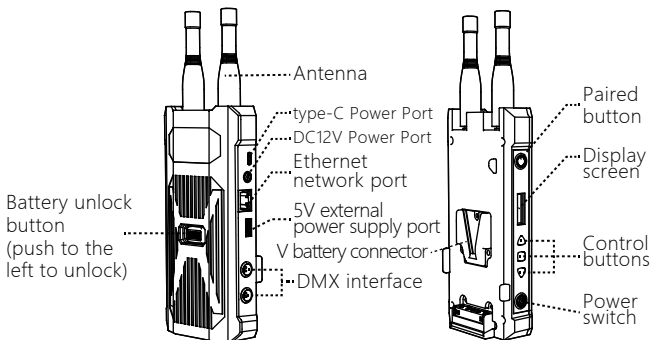

1. Power supply

Can use 5V Type C port power supply or 12V round port power supply or 14.8V V-port battery power supply.

2. Multi-protocol support

Support ArtNet , CRMX , DMX , HuiGuan 2.4G, easy to connect to console, computer, iPad and devices with LumenRadi module. Can be controlled by software such as Madrix, Lumenair and HuiGuan APP.

3. Pairing method

First, disconnect the CRMX device that needs to be connected, and then short press the pairing button to pair, generally it takes about 5s to complete the pairing.

4. Connection method

4.1 Connecting through Ethernet network port: The controller supports ArtNet protocol and has 4 domains, when you use the console supports ArtNet protocol, you can connect through the network port, when you use ArtNet , you need to set the control mode

to APP. The output of domain 0 can be selected as wired DMX signal or CRMX signal.

4.2 Connecting through wired DMX port: After connected through DMX port, set the control mode to 'DMX-> CRMX' or 'DMX ->2.4G', the DMX signal will be converted to CRMX signal or sink 2.4G signal.

4.3 Connect through WIFI:

After setting the control mode to APP , the WIFI of the device will be opened , you can use your mobile phone/iPad connect to the controller, and open the HuiGuan APP to modify the DMX address code, modify the configuration table, turnoff and other operations on the connected devices, and also use the Luminair software for lighting control.

5. Control mode

5.1 APP/ARTNET

Users can connect to the console or router through the network port, when the control box receives artNet signal, it will forward it to wireless DMX signal , where domain 0 can choose to forward it to CRMX or wired DMX signal.

5.2 DMX->CRMX

In this mode, users can convert wired DMX signal to CRMX signal through wired DMX port, and can connect with devices that have CRMX signal through pairing button.

5.3 DMX->2.4G

In this mode, users can convert the wired DMX signal to HuiGuan 2.4G signal through the DMX signal port, and connect with HuiGuan's fixtures through the pairing button.

5.4 CRMX->DMX

In this mode, the control box, as a slave, will convert the received wireless CRMX signal to wired DMX signal, long press the pairing key will disconnect from the host.

5.5 2.4G->DMX

In this mode, the control box, as a slave, will convert the received HuiGuan 2.4G signal to a wired DMX signal, and disconnect from the host by pressing and holding the pairing button.

6.Product parameters

Name	LumenRadio Signaler E360
Voltage	5V 2A 12V 1A
Power source	5V type C port power supply, 12V round port power supply or 14.8V V port battery power supply
Waterproof grade	IP20
Product size	255*86*42mm
Connection method	Ethernet port, wired DMX port or WIFI
Product weight	0.26KG

7.Precautions

- Please read the manual carefully and understand all the contents before using
- Please keep away from corrosive chemicals and liquids to avoid mechanical damage.
- When not using the product, please cut off the power and put away the power cord.
- Tidy up the power cord when using to avoid tripping and causing power disconnection or product damage.
- Do not disassemble the product by yourself, otherwise the warranty will be void. If the product is faulty, please refer it to an authorized technician for inspection or repair.
- Drop, external impact may cause product failure, man-made damage is not in the scope of our warranty.
- We have the final right to interpret the product. Product design and specifications are subject to change without notice.

8. After-sales service

① Sincerely thank you for choosing this product, as our users, you will be provided after-sales service: from the date of purchase, product quality problems free warranty within one year, lifelong maintenance only charge material costs.

② During the warranty period, due to the product's own failure, the company will provide you with free repair services, please do not disassemble the machine to repair yourself. Customers who exceed the warranty period still enjoy the quality after-sales service provided by our company.

③ The following cases do not belong to free warranty service: man-made damage; disassembly, modification, repair without authorization; damage caused by external reasons (lightning, power supply, etc.); damage caused by incorrect installation or use by the user; damage to any wear-and-tear type accessories attached to the product; Out of warranty.

9. Product Warranty Card

User Name			
Address			
Contact Number			
Purchase Address			
Purchase Price			
Product Weight		Sales Order Number	
Name And Specification		Machine Number	
Dealer Signature		User Signature	

CERTIFICATE OF CONFORMITY

Product name: LumenRadio Signaler E360

Product Model : _____

Quality level: Qualified Products

Inspector: _____

Date of shipment: _____



In order to maintain your legitimate rights and interests are not infringed, if you have any questions, please contact the after-sales customer service.

Please keep some cards (certificate of conformity) properly, this card will be your proof of enjoying our high quality service.